

Fuel consumption and CO2 emissions for Crafter models Delivery Van / Kombi with emission standard EEV (stricter than EURO V).

With manual gearbox, fuel consumption (litres/100 km) and combined CO₂ emissions (g/km), fuel tank capacity approx. 75 litres

Engine	2.0 l TDI (80 kW)	2.0 l BiTDI (120 kW)
--------	-------------------	----------------------

Rear-axle ratio	3.923:1	4.182:1	4.364:1	3.692:1	3.923:1	4.182:1
-----------------	---------	---------	---------	---------	---------	---------

Crafter 30/35 Delivery Van

urban	9.4 – 9.4	10.1 – 10.6	10.8 – 11.3	8.9 – 9.0	9.2 – 9.2	9.9 – 10.2
extra-urban	7.7 – 8.1	7.8 – 7.9	8.1 – 8.3	7.3 – 7.7	7.5 – 7.9	7.6 – 7.8
combined	8.3 – 8.6	8.6 – 8.9	9.1 – 9.4	7.9 – 8.2	8.1 – 8.4	8.4 – 8.7
CO ₂ emissions combined	218 – 226	226 – 234	239 – 247	208 – 216	213 – 221	221 – 229

With Shiftmatic, fuel consumption (litres/100 km) and combined CO₂ emissions (g/km), fuel tank capacity approx. 75 litres

Engine	2.5 l BlueTDI (100 kW)
--------	------------------------

Rear-axle ratio	4.182:1	4.364:1	4.727:1
-----------------	---------	---------	---------

Crafter 30/35 Delivery Van

urban	10.3	10.6	
extra-urban	8.5	8.7	
combined	9.1	9.4	
CO ₂ emissions combined	240	247	

Fuel consumption and CO₂ emissions for Crafter models Delivery Van / Kombi with emission standard Euro 5.

With manual gearbox, fuel consumption (litres/100 km) and combined CO₂ emissions (g/km), fuel tank capacity approx. 75 litres

Engine	2.0 l TDI (80 kW)	2.0 l TDI (100 kW)	2.0 l BiTDI (120 kW)
--------	-------------------	--------------------	----------------------

Rear-axle ratio	3.923:1	4.182:1	4.364:1	3.923:1	4.182:1	4.364:1	3.692:1	3.923:1	4.182:1
-----------------	---------	---------	---------	---------	---------	---------	---------	---------	---------

Crafter 30/35 Delivery Van (only models with a maximum kerb weight of 2,815 kg incl. conversions)

urban	9.1 – 9.4	10.1 – 10.7	10.5 – 10.8	9.1 – 9.4	10.1 – 10.7	10.5 – 10.8	8.7 – 9.0	9.0 – 9.2	9.9 – 10.3
extra-urban	7.9 – 8.1	7.8 – 7.9	8.4 – 8.6	7.9 – 8.1	7.8 – 7.9	8.4 – 8.6	7.5 – 7.7	7.6 – 7.9	7.6 – 7.8
combined	8.3 – 8.6	8.6 – 8.9	9.1 – 9.4	8.3 – 8.6	8.6 – 8.9	9.1 – 9.4	7.9 – 8.2	8.1 – 8.4	8.4 – 8.7
CO ₂ emissions combined	218 – 226	226 – 234	239 – 247	218 – 226	226 – 234	239 – 247	208 – 216	213 – 221	221 – 229


Crafter 30/35 Kombi

urban	9.0	9.9	10.2	9.0	9.9	10.2	8.5	8.9	
extra-urban	7.3	7.2	7.9	7.3	7.2	7.9	6.9	7.0	
combined	7.9	8.2	8.7	7.9	8.2	8.7	7.5	7.7	
CO ₂ emissions combined	208	216	229	208	216	229	197	203	

Motoren Delivery Van / Kombi.

Diesel engines	2.0 l TDI engine (80 kW)	2.0 l TDI engine (100 kW) (only with Crafter 30/35)
Mixture preparation/injection method	common rail direct injection	common rail direct injection
No. of cylinders	4	4
Cubic capacity, cm ³	1,968	1,968
Output, kW at rpm	80 at 3,500	100 at 3,500
Max. torque, Nm/rpm	300/1,500 – 2,250	340/1,575 – 2,250
EU exhaust emission directive	EEV according to regulation 2005/55/EC, version 2008/74/EC or according to EC regulation 715/2007 Euro 5 respectively	according to EC regulation 715/2007 Euro 5
Diesel particulate filter (DPF)	standard	standard
6-speed manual gearbox	standard	standard
Rear-wheel drive	standard	standard
Type of fuel	diesel, in accordance with DIN EN 590	diesel, in accordance with DIN EN 590

Diesel engines	2.5 l BlueTDI engine (100 kW)	2.0 l BiTDI engine (120 kW)
Mixture preparation/injection method	common rail direct injection	BiTurbo common rail direct injection
No. of cylinders	5	4
Cubic capacity, cm ³	2,461	1,968
Output, kW at rpm	100 at 3,500	120 at 3,600
Max. torque, Nm/rpm	330/2,000	400/1,800
EU exhaust emission directive	EEV according to regulation 2005/55/EC, version 2008/74/EC	EEV according to regulation 2005/55/EC, version 2008/74/EC or according to EC regulation 715/2007 Euro 5 respectively
Diesel particulate filter (DPF)	standard	standard
6-speed manual gearbox/6-speed Shiftmatic	–/standard	standard/–
Rear-wheel drive	standard	standard
Type of fuel	diesel, in accordance with DIN EN 590	diesel, in accordance with DIN EN 590

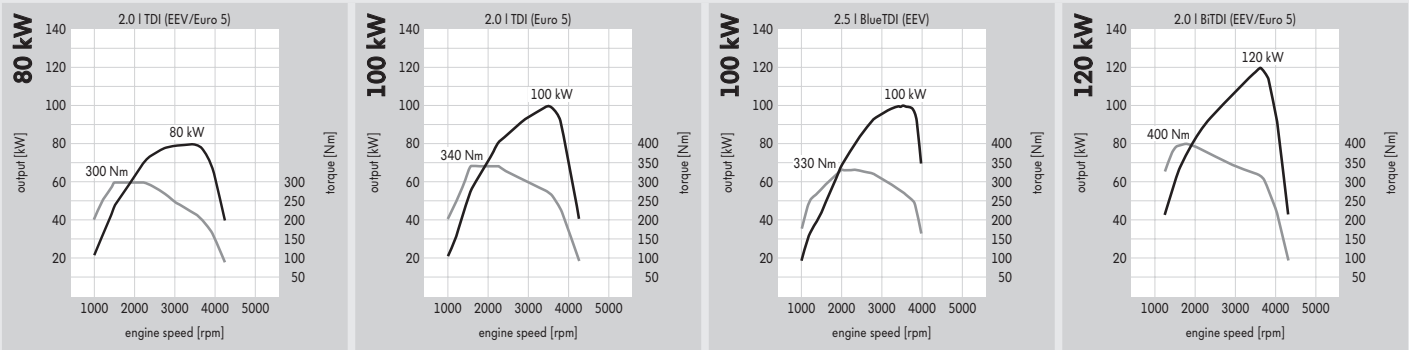

Maximum speeds Delivery Van / Kombi.

With manual gearbox

Model	Engine	Output (kW)	Maximum speeds (kph) with rear-axle ratio					
			3.692:1	3.923:1	4.182:1	4.364:1	4.727:1	5.1:1

Delivery Van with normal roof or high roof

Crafter 30/35	2.0 l TDI	80		149	147	145		
	2.0 l TDI	100		156	154	152		
	2.0 l BiTDI	120	160	160 ¹⁾	157			
Crafter 50	2.0 l TDI	80					135	133
	2.0 l BiTDI	120			154	152	150	144

Delivery Van with super-high roof

Crafter 35	2.0 l TDI	80		143	141	139		
	2.0 l TDI	100		149	147	145		
	2.0 l BiTDI	120	158	156	153			
Crafter 50	2.0 l TDI	80					131	129
	2.0 l BiTDI	120			148	146	144	138

Kombi with normal roof or high roof

Crafter 30/35	2.0 l TDI	80		149	147	145		
	2.0 l TDI	100		156	154	152		
	2.0 l BiTDI	120	160	160				

With Shiftmatic

Model	Engine	Output (kW)	Maximum speeds (kph) with rear-axle ratio			
			4.182:1	4.364:1	4.727:1	5.1:1

Delivery Van with normal roof

Crafter 30/35	2.5 l BlueTDI	100	154	150		
Crafter 50	2.5 l BlueTDI	100			138	135

Delivery Van with high roof or super-high roof (super-high roof not for Crafter 30)

Crafter 30/35	2.5 l BlueTDI	100	150	146		
Crafter 50	2.5 l BlueTDI	100			134	131

Weights Delivery Van / Kombi.

Model/ Gross vehicle weight (kg)	Wheelbase (mm)	Unladen weight with driver (kg) from – to	Payload (kg) from – to	Axle load limit front/rear (kg)	Gross train weight 12 % gradient (kg)
Delivery Van with normal roof					
Crafter 30 3,000	3,250	1,904 – 2,319	1,096 – 681	1,650/1,800	5,000
Crafter 35 3,500		1,917 – 2,485	1,583 – 1,015	1,650/2,250	5,300 – 7,000
Crafter 30 3,000	3,665	1,972 – 2,319	1,028 – 681	1,650/1,800	5,000
Crafter 35 3,500		1,985 – 2,574	1,515 – 926	1,650/2,250	5,300 – 7,000
Crafter 50 5,000		2,265 – 2,954	2,735 – 2,046	1,850/3,500	7,000 – 8,000
Delivery Van with high roof					
Crafter 30 3,000	3,665	2,008 – 2,319	992 – 681	1,650/1,800	5,000
Crafter 35 3,500		2,021 – 2,610	1,479 – 890	1,650/2,250	5,300 – 7,000
Crafter 50 5,000		2,301 – 2,990	2,699 – 2,010	1,850/3,500	7,000 – 8,000
Crafter 35 3,500	4,325	2,155 – 2,772	1,345 – 728	1,650/2,250	5,300 – 7,000
Crafter 50 5,000		2,467 – 3,184	2,533 – 1,816	1,850/3,500	7,000 – 8,000
Crafter 35 3,500	4,325 with overhang	2,207 – 2,819	1,293 – 681	1,650/2,250	5,300 – 7,000
Crafter 50 5,000		2,514 – 3,259	2,486 – 1,741	1,850/3,500	7,000 – 8,000
Delivery Van with super-high roof					
Crafter 35 3,500	3,665	2,057 – 2,646	1,443 – 854	1,650/2,250	5,300 – 7,000
Crafter 50 5,000		2,337 – 3,026	2,663 – 1,974	1,850/3,500	7,000 – 8,000
Crafter 35 3,500	4,325	2,182 – 2,799	1,318 – 701	1,650/2,250	5,300 – 7,000
Crafter 50 5,000		2,494 – 3,211	2,506 – 1,789	1,850/3,500	7,000 – 8,000
Crafter 35 3,500	4,325 with overhang	2,235 – 2,819	1,265 – 681	1,650/2,250	5,300 – 7,000
Crafter 50 5,000		2,542 – 3,287	2,458 – 1,713	1,850/3,500	7,000 – 8,000

Weights Delivery Van / Kombi.

Model/ Gross vehicle weight (kg)	Wheelbase (mm)	Unladen weight with driver (kg) from – to	Payload (kg) from – to	Axle load limit front/rear (kg)	Gross train weight 12 % gradient (kg)
--	-------------------	---	------------------------------	---------------------------------------	---

Kombi with normal roof

Crafter 30 3,190	3,250	1,976 – 2,739	1,214 – 451	1,650/1,800	5,190
Crafter 35 3,500		1,976 – 2,783	1,524 – 717	1,650/2,250	5,500 – 7,000
Crafter 30 3,190	3,665	2,005 – 2,739	1,185 – 451	1,650/1,800	5,190
Crafter 35 3,500		2,028 – 2,801	1,472 – 699	1,650/2,250	5,500 – 7,000

Kombi with high roof

Crafter 30 3,190	3,665	2,041 – 2,739	1,149 – 451	1,650/1,800	5,190
Crafter 35 3,500		2,064 – 2,815	1,436 – 685	1,650/2,250	5,500 – 7,000
Crafter 35 3,500	4,325	2,219 – 2,815	1,281 – 685	1,650/2,250	5,500 – 7,000

Roof load limits

Model	Roof load limit (kg)
-------	-------------------------

Trailer nose weights

Trailer nose weight (kg)	With trailer load limit (kg)
-----------------------------	---------------------------------

Delivery Van and Kombi

Normal roof	300
High roof	150
Super high roof	


100	2,000
120	2,800/3,000
140	3,500

Gross train weights and trailer load limits Delivery Van / Kombi.

With manual gearbox								
Model	Engine	Out-put (kW)	Gross train weight/trailer load limit (kg) with rear-axle ratio					
			3.692:1	3.923:1	4.182:1	4.364:1	4.727:1	5.1:1
Delivery Van with normal roof, high roof or super-high roof (super-high roof not for Crafter 30)								
Crafter 30	2.0 l TDI	80		5,000/2,000	5,000/2,000	5,000/2,000		
	2.0 l TDI	100		5,000/2,000	5,000/2,000	5,000/2,000		
	2.0 l BiTDI	120	5,000/2,000	5,000/2,000	5,000/2,000			
Crafter 35	2.0 l TDI	80		5,500/2,000	5,500/2,000	5,500/2,000		
						6,300/2,800		
						7,000/3,500		
	2.0 l TDI	100		5,500/2,000	5,500/2,000	5,500/2,000		
						6,300/2,800		
						7,000/3,500		
	2.0 l BiTDI	120	5,300/2,000	5,500/2,000	5,500/2,000			
				6,300/2,800	6,300/2,800			
				7,000/3,500	7,000/3,500			
Crafter 50	2.0 l TDI	80					7,000/2,000	7,000/2,000
							7,000/3,000	7,000/3,000
							7,000/3,500	7,000/3,500
	2.0 l BiTDI	120			7,000/2,000	7,000/2,000	7,000/2,000	7,000/2,000
					7,000/3,000	7,500/3,000	8,000/3,000	8,000/3,000
					7,000/3,500	7,500/3,500	8,000/3,500	8,000/3,500
Kombi with normal roof or high roof								
Crafter 30	2.0 l TDI	80		5,190/2,000	5,190/2,000	5,190/2,000		
	2.0 l TDI	100		5,190/2,000	5,190/2,000	5,190/2,000		
	2.0 l BiTDI	120	5,190/2,000	5,190/2,000				
Crafter 35	2.0 l TDI	80		5,500/2,000	5,500/2,000	5,500/2,000		
						6,300/2,800		
						7,000/3,500		
	2.0 l TDI	100		5,500/2,000	5,500/2,000	5,500/2,000		
						6,300/2,800		
						7,000/3,500		
	2.0 l BiTDI	120	5,500/2,000	5,500/2,000				
			6,300/2,800					
With Shiftmatic								
Model	Engine	Output (kW)	Gross train weight/trailer load limit (kg) with rear-axle ratio					
			4.182:1	4.364:1	4.727:1	5.1:1		
Delivery Van with normal roof, high roof or super-high roof (super-high roof not for Crafter 30)								
Crafter 30	2.5 l BlueTDI	100	5,000/2,000	5,000/2,000				
Crafter 35	2.5 l BlueTDI	100	5,500/2,000	5,500/2,000				
				6,300/2,800				
				7,000/3,500				
Crafter 50	2.5 l BlueTDI	100				7,000/2,000	7,000/2,000	
						7,000/3,000	7,000/3,000	
						7,000/3,500	7,000/3,500	


Dimensional drawings Delivery Van / Kombi.

Crafter 30/35 Delivery Van with short wheelbase and normal roof

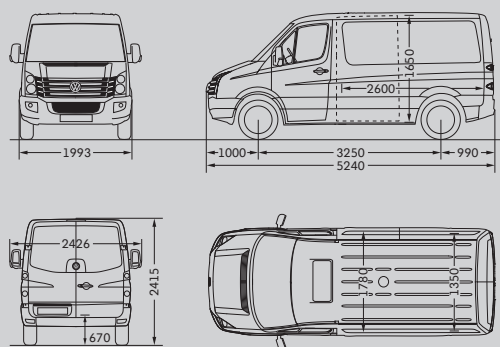


load compartment, volume	7.5 m ³
lateral sliding door, width/height	1,040/1,520 mm
rear wing doors, width/height	1,565/1,540 mm
turning circle	12.3 m

Crafter 30/35 Delivery Van with medium wheelbase and normal roof

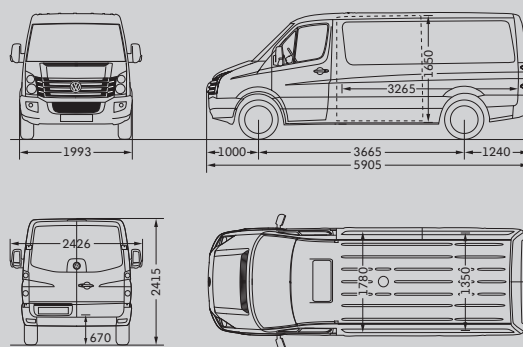


load compartment, volume	9.0 m ³
lateral sliding door, width/height	1,300/1,520 mm
rear wing doors, width/height	1,565/1,540 mm
turning circle	13.6 m

Crafter 30/35 Delivery Van with medium wheelbase and high roof

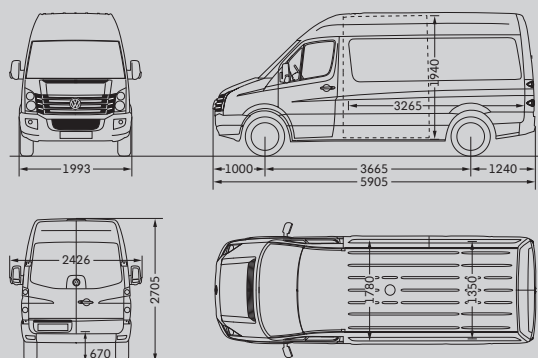


load compartment, volume	10.5 m ³
lateral sliding door, width/height	1,300/1,820 mm
rear wing doors, width/height	1,565/1,840 mm
turning circle	13.6 m

Crafter 35 Delivery Van with medium wheelbase and super-high roof

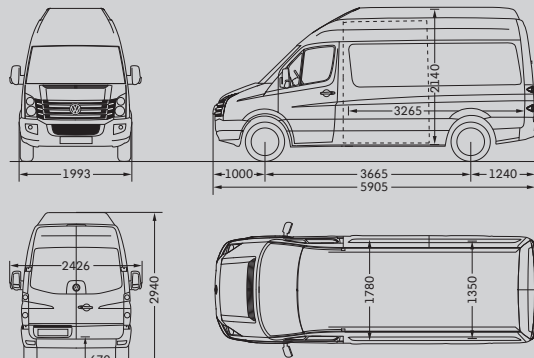


load compartment, volume	11.5 m ³
lateral sliding door, width/height	1,300/1,820 mm
rear wing doors, width/height	1,565/1,840 mm
turning circle	13.6 m

Crafter 35 Delivery Van with long wheelbase and high roof

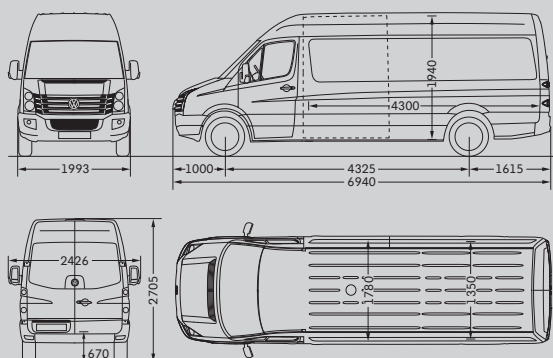

load compartment, volume	14.0 m ³
lateral sliding door, width/height	1,300/1,820 mm
rear wing doors, width/height	1,565/1,840 mm
turning circle	15.6 m


Crafter 35 Delivery Van with long wheelbase and super-high roof

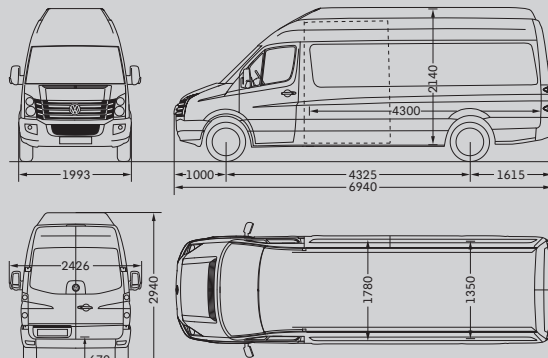


load compartment, volume	15.5 m ³
lateral sliding door, width/height	1,300/1,820 mm
rear wing doors, width/height	1,565/1,840 mm
turning circle	15.6 m

Dimensional drawings Delivery Van / Kombi.


Crafter 35 Delivery Van with long wheelbase, overhang and high roof

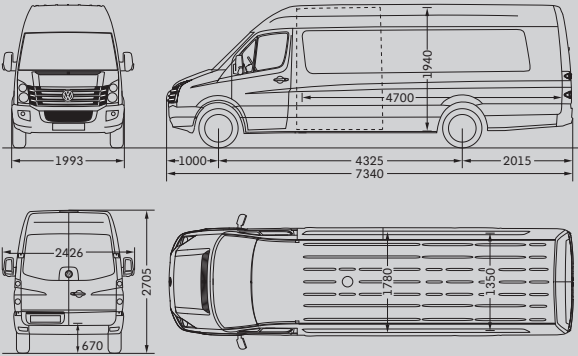	
load compartment, volume	15.5 m ³
lateral sliding door, width/height	1,300/1,820 mm
rear wing doors, width/height	1,565/1,840 mm
turning circle	15.6 m


Crafter 35 Delivery Van with long wheelbase, overhang and super-high roof

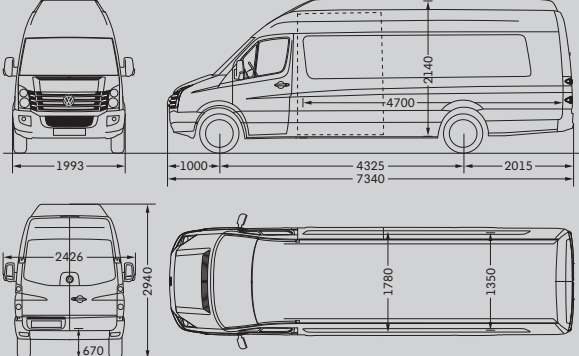	
load compartment, volume	17.0 m ³
lateral sliding door, width/height	1,300/1,820 mm
rear wing doors, width/height	1,565/1,840 mm
turning circle	15.6 m


Crafter 50 Delivery Van with medium wheelbase and normal roof

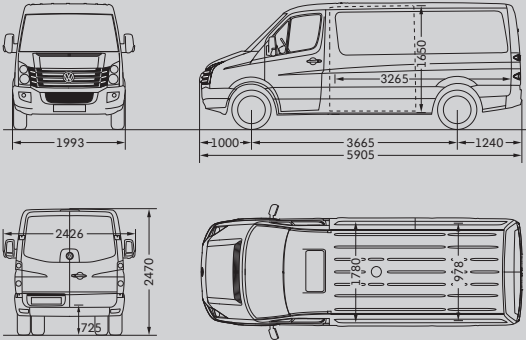	
load compartment, volume	9.0 m ³
lateral sliding door, width/height	1,300/1,520 mm
rear wing doors, width/height	1,565/1,540 mm
turning circle	13.6 m


Crafter 50 Delivery Van with medium wheelbase and high roof

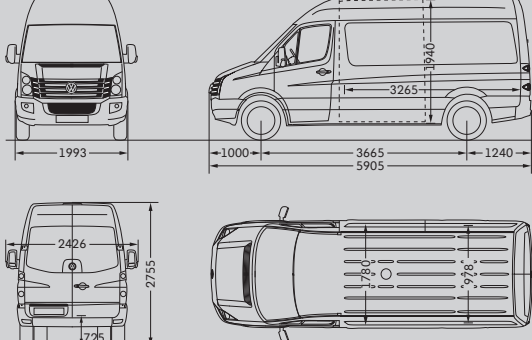	
load compartment, volume	10.5 m ³
lateral sliding door, width/height	1,300/1,820 mm
rear wing doors, width/height	1,565/1,840 mm
turning circle	13.6 m

Crafter 50 Delivery Van with medium wheelbase and super-high roof

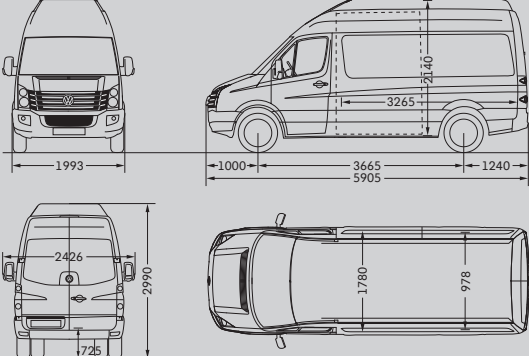
	
load compartment, volume	11.5 m ³
lateral sliding door, width/height	1,300/1,820 mm
rear wing doors, width/height	1,565/1,840 mm
turning circle	13.6 m

Crafter 50 Delivery Van with long wheelbase and high roof

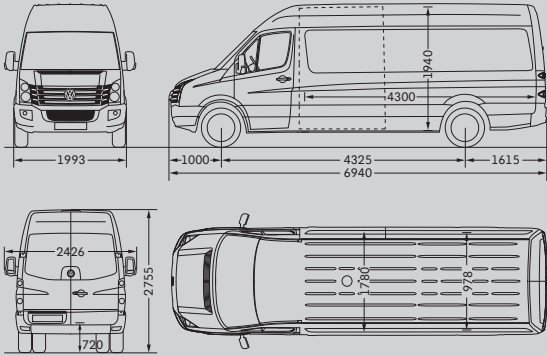	
load compartment, volume	14.0 m ³
lateral sliding door, width/height	1,300/1,820 mm
rear wing doors, width/height	1,565/1,840 mm
turning circle	15.6 m


Dimensional drawings Delivery Van / Kombi.

Crafter 50 Delivery Van with long wheelbase and super-high roof

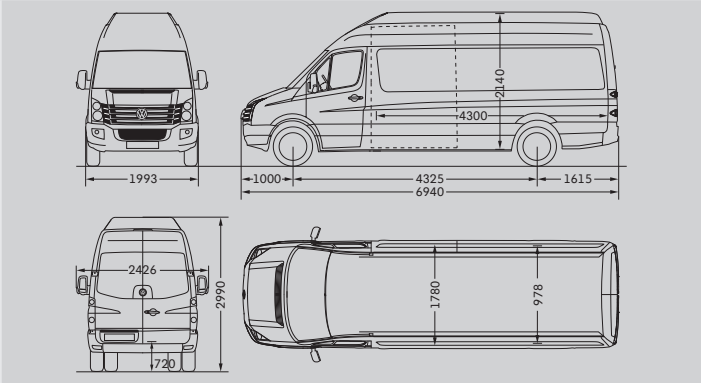


load compartment, volume	15.5 m ³
lateral sliding door, width/height	1,300/1,820 mm
rear wing doors, width/height	1,565/1,840 mm
turning circle	15.6 m

Crafter 50 Delivery Van with long wheelbase, overhang and high roof

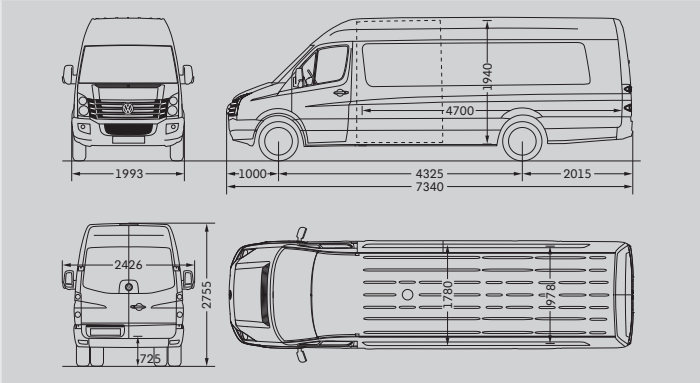

load compartment, volume	15.5 m ³
lateral sliding door, width/height	1,300/1,820 mm
rear wing doors, width/height	1,565/1,840 mm
turning circle	15.6 m


Crafter 50 Delivery Van with long wheelbase, overhang and super-high roof

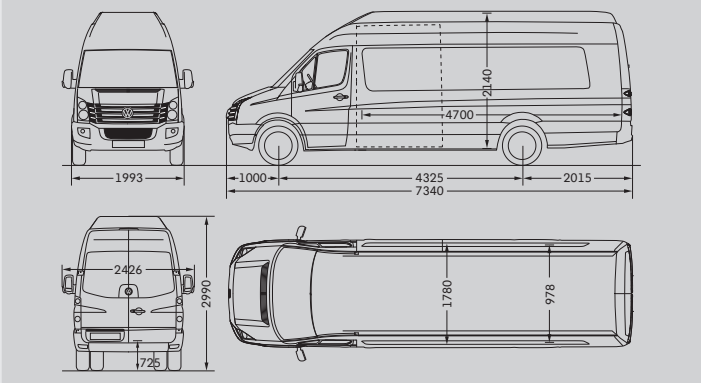

load compartment, volume	17.0 m ³
lateral sliding door, width/height	1,300/1,820 mm
rear wing doors, width/height	1,565/1,840 mm
turning circle	15.6 m


Dimensional drawings Delivery Van / Kombi.

Crafter 30/35 Kombi with short wheelbase and normal roof

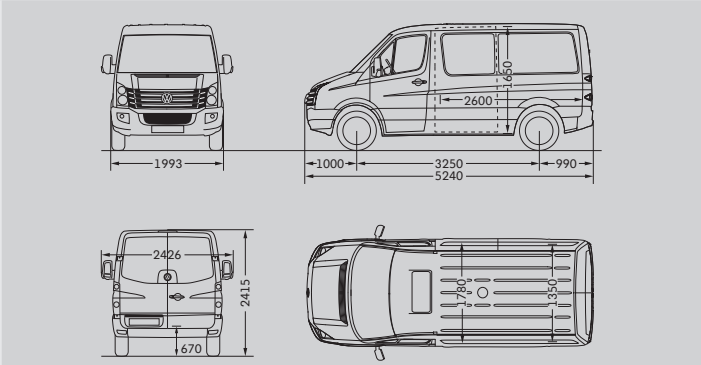


load compartment, volume	7.5 m ³
lateral sliding door, width/height	1,040/1,520 mm
rear wing doors, width/height	1,565/1,540 mm
turning circle	12.3 m

Crafter 30/35 Kombi with medium wheelbase and normal roof

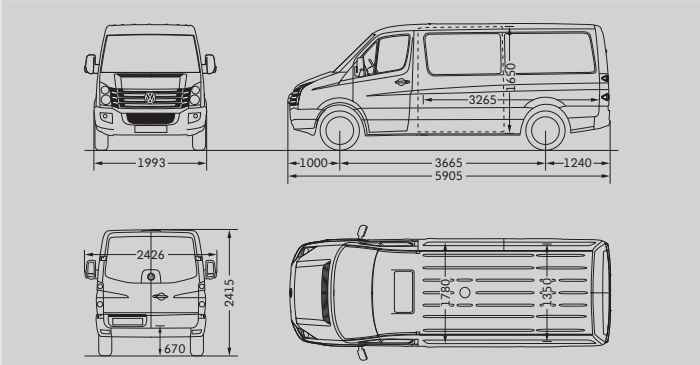


load compartment, volume	9.0 m ³
lateral sliding door, width/height	1,300/1,520 mm
rear wing doors, width/height	1,565/1,540 mm
turning circle	13.6 m

Crafter 30/35 Kombi with medium wheelbase and high roof

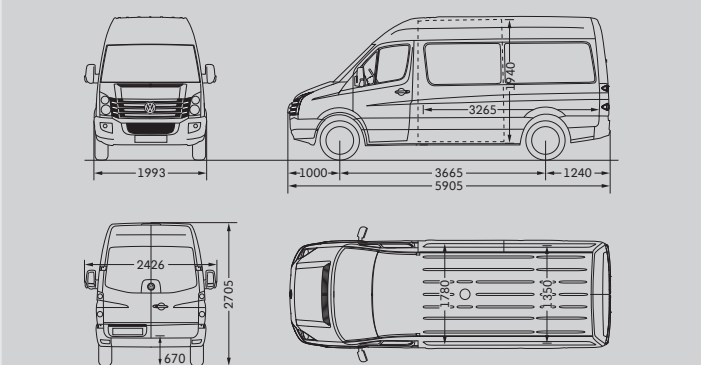

load compartment, volume	10.5 m ³
lateral sliding door, width/height	1,300/1,820 mm
rear wing doors, width/height	1,565/1,840 mm
turning circle	13.6 m

Crafter 35 Kombi with long wheelbase and high roof

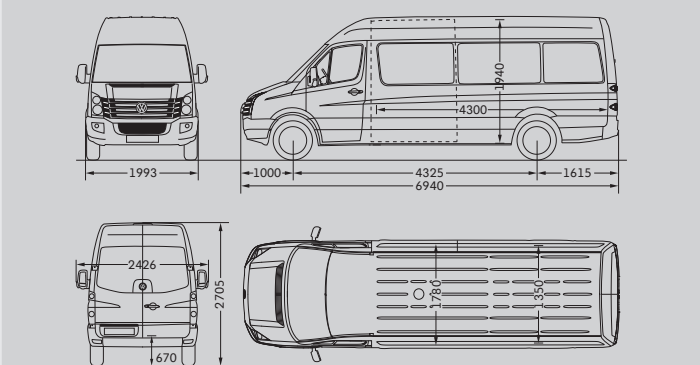

load compartment, volume	14.0 m ³
lateral sliding door, width/height	1,300/1,820 mm
rear wing doors, width/height	1,565/1,840 mm
turning circle	15.6 m

Fuel consumption and CO2 emissions for Crafter models Dropside Van / Chassis with emission standard EEV (stricter than EURO V).

With manual gearbox, fuel consumption (litres/100 km) and combined CO₂ emissions (g/km), fuel tank capacity approx. 75 litres

Engine	2.0 l TDI (80 kW)	2.0 l BiTDI (120 kW)
--------	-------------------	----------------------

Rear-axle ratio	4.182:1	4.364:1	4.727:1	3.692:1	3.923:1	4.182:1
-----------------	---------	---------	---------	---------	---------	---------

Crafter 30/35 Dropside Van

urban	10.4 – 10.6	10.3 – 11.3	11.5	8.6 – 9.0	9.0 – 9.2	9.5 – 10.2
extra-urban	6.9 – 7.9	7.8 – 8.3	8.7	6.9 – 7.7	7.0 – 7.9	7.2 – 7.8
combined	8.2 – 8.9	8.7 – 9.4	9.7	7.5 – 8.2	7.7 – 8.4	8.0 – 8.7
CO ₂ emissions combined	216 – 234	229 – 247	255	197 – 216	203 – 221	210 – 229

With Shiftmatic, fuel consumption (litres/100 km) and combined CO₂ emissions (g/km), fuel tank capacity approx. 75 litres

Engine	2.5 l BlueTDI (100 kW)
--------	------------------------

Rear-axle ratio	4.364:1	4.727:1
-----------------	---------	---------

Crafter 30/35 Dropside Van (except double cab with short wheelbase)

urban	10.6	10.9
extra-urban	8.7	8.9
combined	9.4	9.6
CO ₂ emissions combined	247	253

Fuel consumption and CO₂ emissions for Crafter models Dropside Van / Chassis with emission standard Euro 5.

With manual gearbox, fuel consumption (litres/100 km) and combined CO₂ emissions (g/km), fuel tank capacity approx. 75 litres

Engine	2.0 l TDI (80 kW)	2.0 l TDI (100 kW)	2.0 l BiTDI (120 kW)
--------	-------------------	--------------------	----------------------

Rear-axle ratio	4.182:1	4.364:1	4.727:1	4.182:1	4.364:1	4.727:1	3.692:1	3.923:1	4.182:1
-----------------	---------	---------	---------	---------	---------	---------	---------	---------	---------


Crafter 30/35 Dropside Van (only models with a maximum kerb weight of 2.815 kg incl. special bodies)

urban	9.8 – 10.7	10.2 – 10.8	11.5	9.8 – 10.7	10.2 – 10.8	11.5	8.4 – 9.0	8.8 – 9.2	9.6 – 10.3
extra-urban	7.3 – 7.9	7.9 – 8.6	8.7	7.3 – 7.9	7.9 – 8.6	8.7	7.0 – 7.7	7.1 – 7.9	7.1 – 7.8
combined	8.2 – 8.9	8.7 – 9.4	9.7	8.2 – 8.9	8.7 – 9.4	9.7	7.5 – 8.2	7.7 – 8.4	8.0 – 8.7
CO ₂ emissions combined	216 – 234	229 – 247	255	216 – 234	229 – 247	255	197 – 216	203 – 221	210 – 229

Engines Dropside Van / Chassis.

Diesel engines	2.0 l TDI engine (80 kW)	2.0 l TDI engine (100 kW) (only with Crafter 30/35)
Mixture preparation/injection method	common rail direct injection	common rail direct injection
No. of cylinders	4	4
Cubic capacity, cm ³	1.968	1.968
Output, kW at rpm	80 at 3.500	100 at 3.500
Max. torque, Nm/rpm	300/1.500 – 2.250	340/1.575 – 2.250
EU exhaust emission directive	EEV according to regulation 2005/55/EC, version 2008/74/EC or according to EC regulation 715/2007 Euro 5 respectively	according to EC regulation 715/2007 Euro 5
Diesel particulate filter (DPF)	standard	standard
6-speed manual gearbox	standard	standard
Rear-wheel drive	standard	standard
Type of fuel	diesel, in accordance with DIN EN 590	diesel, in accordance with DIN EN 590

Diesel engines	2.5 l BlueTDI engine (100 kW)	2.0 l BiTDI engine (120 kW)
Mixture preparation/injection method	common rail direct injection	BiTurbo common rail direct injection
No. of cylinders	5	4
Cubic capacity, cm ³	2.461	1.968
Output, kW at rpm	100 at 3.500	120 at 3.600
Max. torque, Nm/rpm	330/2.000	400/1.800
EU exhaust emission directive	EEV according to regulation 2005/55/EC, version 2008/74/EC	EEV according to regulation 2005/55/EC, version 2008/74/EC or according to EC regulation 715/2007 Euro 5 respectively
Diesel particulate filter (DPF)	standard	standard
6-speed manual gearbox/6-speed Shiftmatic	–/standard	standard/–
Rear-wheel drive	standard	standard
Type of fuel	diesel, in accordance with DIN EN 590	diesel, in accordance with DIN EN 590

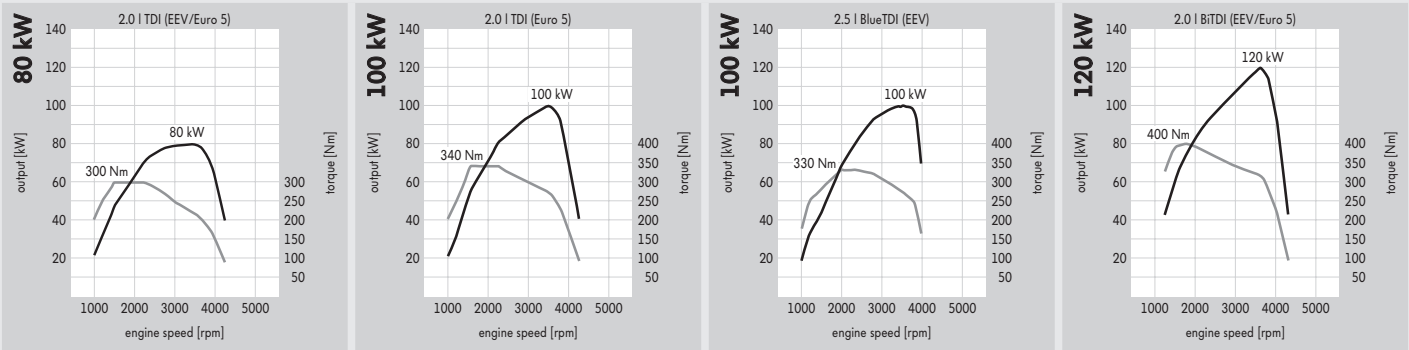

Maximum speeds Dropside Van / Chassis.

With manual gearbox

Model	Engine	Output (kW)	Maximum speeds (kph) with rear-axle ratio					
			3.692:1	3.923:1	4.182:1	4.364:1	4.727:1	5.1:1

Pritschenwagen mit Einzelkabine bzw. Doppelkabine

Crafter 30/35	2.0 l TDI	80			137	135	133	
	2.0 l TDI	100			142	140	138	
	2.0 l BiTDI	120	152	150 ¹⁾	147			
Crafter 50	2.0 l TDI	80					127	125
	2.0 l BiTDI	120			142	140	138	132

Mit Shiftmatic

Model	Engine	Output (kW)	Maximum speeds (kph) with rear-axle ratio					
			4.364:1	4.727:1			5.1:1	

Pritschenwagen mit Einzelkabine bzw. Doppelkabine (außer Doppelkabine mit kurzem Radstand)

Crafter 30/35	2.5 l BlueTDI	100	145	141	
Crafter 50	2.5 l BlueTDI	100		133	130

Weights Dropside Van / Chassis.

Model/ Gross vehicle weight (kg)	Wheelbase (mm)	Unladen weight with driver (kg) from – to	Payload (kg) from – to	Axle load limit front/rear (kg)	Gross train weight 12 % gradient (kg)
-------------------------------------	----------------	---	------------------------	---------------------------------	---------------------------------------

Chassis with single cab

Crafter 30 3.000	3.250	1.651 – 2.066	1.349 – 934	1.650/1.800	5.000
Crafter 35 3.500		1.664 – 2.079	1.836 – 1.421	1.650/2.250	5.300 – 7.000
Crafter 30 3.000	3.665	1.668 – 2.084	1.332 – 916	1.650/1.800	5.000
Crafter 35 3.500		1.681 – 2.097	1.819 – 1.403	1.650/2.250	5.300 – 7.000
Crafter 50 5.000		1.906 – 2.422	3.094 – 2.578	1.850/3.500	7.000 – 8.000
Crafter 35 3.500	4.325	1.711 – 2.129	1.789 – 1.371	1.650/2.250	5.300 – 7.000
Crafter 50 5.000		1.944 – 2.462	3.056 – 2.538	1.850/3.500	7.000 – 8.000

Chassis with double cab

Crafter 30 3.000	3.250	1.849 – 2.192	1.151 – 808	1.650/1.800	5.000
Crafter 35 3.500		1.862 – 2.277	1.638 – 1.223	1.650/2.250	5.300 – 7.000
Crafter 30 3.000	3.665	1.871 – 2.160	1.129 – 840	1.650/1.800	5.000
Crafter 35 3.500		1.884 – 2.300	1.616 – 1.200	1.650/2.250	5.300 – 7.000
Crafter 50 5.000		2.127 – 2.633	2.873 – 2.367	1.850/3.500	7.000 – 8.000
Crafter 35 3.500	4.325	1.912 – 2.330	1.588 – 1.170	1.800/2.250	5.300 – 7.000
Crafter 50 5.000		2.141 – 2.576	2.859 – 2.424	1.850/3.500	7.000 – 8.000

Weights Dropside Van / Chassis.

Model/ Gross vehicle weight (kg)	Wheelbase (mm)	Unladen weight with driver (kg) from – to	Payload (kg) from – to	Axle load limit front/rear (kg)	Gross train weight 12 % gradient (kg)
--	-------------------	---	------------------------------	---------------------------------------	---

Dropside Van with single cab

Crafter 30 3.000	3.250	1.849 – 2.264	1.151 – 736	1.650/1.800	5.000
Crafter 35 3.500		1.862 – 2.227	1.638 – 1.223	1.650/2.250	5.500 – 7.000
Crafter 30 3.000	3.665	1.898 – 2.314	1.102 – 686	1.650/1.800	5.000
Crafter 35 3.500		1.911 – 2.327	1.589 – 1.173	1.650/2.250	5.500 – 7.000
Crafter 50 5.000		2.207 – 2.723	2.793 – 2.277	1.850/3.500	7.000 – 8.000
Crafter 35 3.500	4.325	1.990 – 2.408	1.510 – 1.092	1.650/2.250	5.500 – 7.000
Crafter 50 5.000		2.291 – 2.809	2.709 – 2.191	1.850/3.500	7.000 – 8.000

Dropside Van with double cab

Crafter 30 3.000	3.250	2.007 – 2.350	993 – 650	1.650/1.800	5.000
Crafter 35 3.500		2.020 – 2.435	1.480 – 1.065	1.650/2.250	5.500 – 7.000
Crafter 30 3.000	3.665	2.061 – 2.350	939 – 650	1.650/1.800	5.000
Crafter 35 3.500		2.074 – 2.490	1.426 – 1.010	1.650/2.250	5.500 – 7.000
Crafter 50 5.000		2.358 – 2.864	2.642 – 2.136	1.850/3.500	7.000 – 8.000
Crafter 35 3.500	4.325	2.145 – 2.563	1.355 – 937	1.800/2.250	5.500 – 7.000
Crafter 50 5.000		2.434 – 2.869	2.566 – 2.131	1.850/3.500	7.000 – 8.000

Roof load limits

Model	Roof load limit (kg)
-------	-------------------------

Trailer nose weights

Trailer nose weight (kg)	With trailer load limit (kg)
-----------------------------	---------------------------------

Chassis and Dropside Van

Single/double cab	100


100	2.000
120	2.800/3.000
140	3.500

Gross train weights and trailer load limits Dropside Van / Chassis.

With manual gearbox								
Model	Engine	Out-put (kW)	Gross train weight/trailer load limit (kg) with rear-axle ratio					
			3.692:1	3.923:1	4.182:1	4.364:1	4.727:1	5.1:1
Chassis/Dropside Van with single cab i.e. double cab								
Crafter 30	2.0 l TDI	80			5.000/2.000	5.000/2.000	5.000/2.000	
	2.0 l TDI	100			5.000/2.000	5.000/2.000	5.000/2.000	
	2.0 l BiTDI	120	5.000/2.000	5.000/2.000	5.000/2.000			
Crafter 35	2.0 l TDI	80			5.500/2.000	5.500/2.000	5.500/2.000	
						6.300/2.800	6.300/2.800	
						7.000/3.500	7.000/3.500	
	2.0 l TDI	100			5.500/2.000	5.500/2.000	5.500/2.000	
						6.300/2.800	6.300/2.800	
						7.000/3.500	7.000/3.500	
	2.0 l BiTDI	120	5.300/2.000	5.500/2.000	5.500/2.000			
				6.300/2.800	6.300/2.800			
					7.000/3.500			
Crafter 50	2.0 l TDI	80					7.000/2.000	7.000/2.000
							7.000/3.000	7.000/3.000
							7.000/3.500	7.000/3.500
	2.0 l BiTDI	120			7.000/2.000	7.000/2.000	7.000/2.000	7.000/2.000
					7.000/3.000	7.500/3.000	8.000/3.000	8.000/3.000
					7.000/3.500	7.500/3.500	8.000/3.500	8.000/3.500
With Shiftmatic								
Model	Engine	Out-put (kW)	Gross train weight/trailer load limit (kg) with rear-axle ratio					
			4.182:1	4.364:1	4.727:1	5.1:1		
Chassis/Dropside Van with single cab i.e. double cab (except double cab with short wheelbase)								
Crafter 30	2.5 l BlueTDI	100	5.000/2.000	5.000/2.000	5.000/2.000			
Crafter 35	2.5 l BlueTDI	100	5.500/2.000	5.500/2.000	5.500/2.000			
				6.300/2.800	6.300/2.800			
				7.000/3.500	7.000/3.500			
Crafter 50	2.5 l BlueTDI	100			7.000/2.000	7.000/2.000	7.000/2.000	7.000/2.000
					7.000/3.000	7.000/3.000	7.000/3.000	
					7.000/3.500	7.000/3.500	7.000/3.500	


Dimensional drawings Dropside Van / Chassis.

Crafter 30 Chassis with single cab and short wheelbase

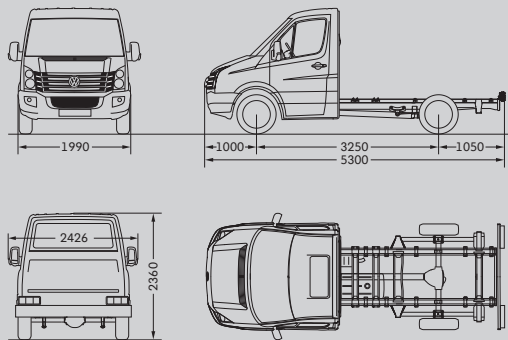


recommended exterior length for special body	3,050 mm
turning circle	12.3 m

Crafter 30 Chassis with single cab and medium wheelbase

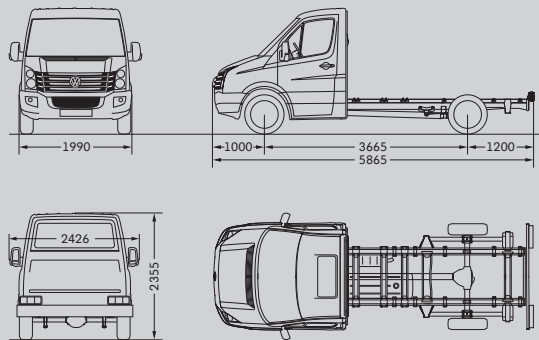


recommended exterior length for special body	3,670 mm
turning circle	13.5 m

Crafter 35 Chassis with single cab and short wheelbase

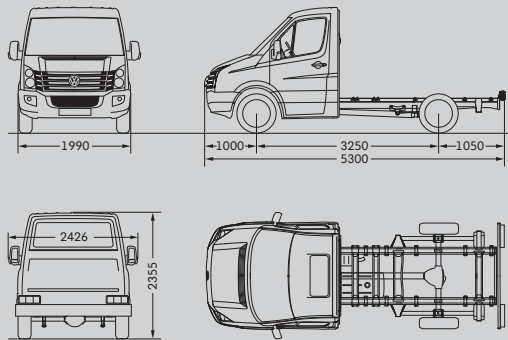


recommended exterior length for special body	3,050 mm
turning circle	12.3 m

Crafter 35 Chassis with single cab and medium wheelbase

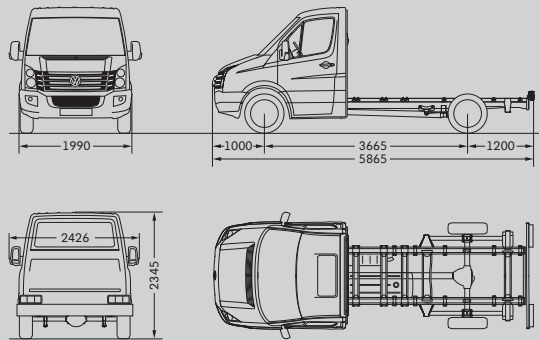


recommended exterior length for special body	3,670 mm
turning circle	13.5 m

Crafter 35 Chassis with single cab and long wheelbase

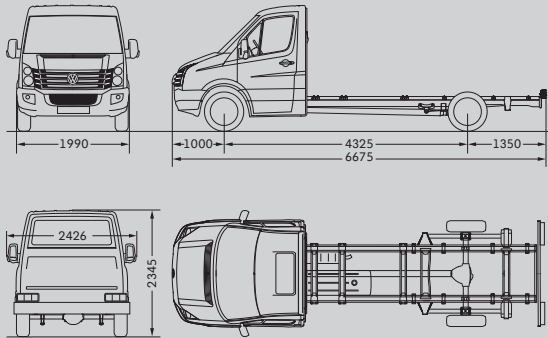

recommended exterior length for special body	4,425 mm
turning circle	15.6 m


Crafter 50 Chassis with single cab and medium wheelbase

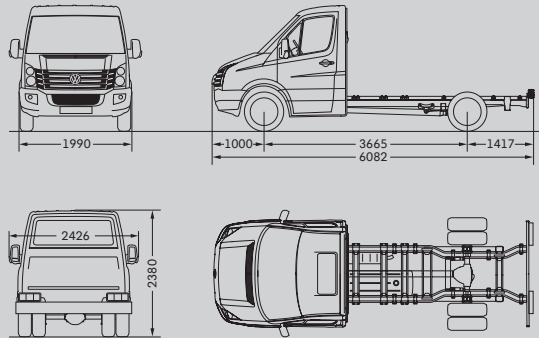

recommended exterior length for special body	3,845 mm
turning circle	13.5 m

Dimensional drawings Dropside Van / Chassis.


Crafter 50 Chassis with single cab and long wheelbase

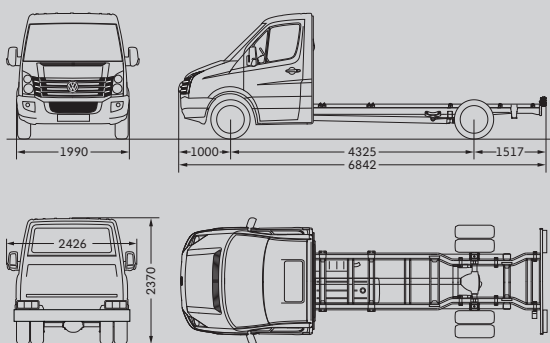

recommended exterior length for special body 4,610 mm

turning circle 15.6 m


Crafter 30 Chassis with double cab and short wheelbase

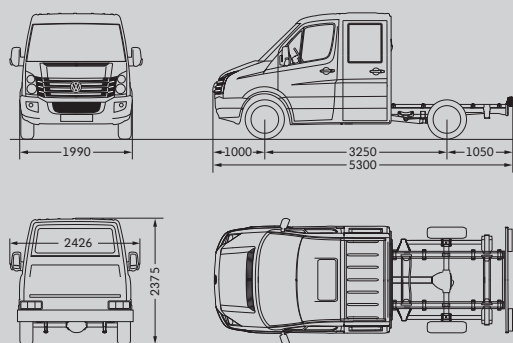

recommended exterior length for special body 2,160 mm

turning circle 12.3 m


Crafter 30 Chassis with double cab and medium wheelbase

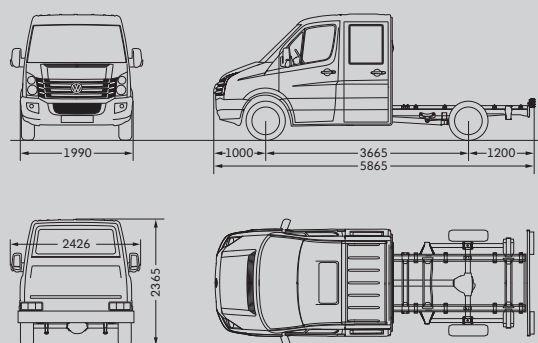

recommended exterior length for special body 2,770 mm

turning circle 13.5 m


Crafter 35 Chassis with double cab and short wheelbase

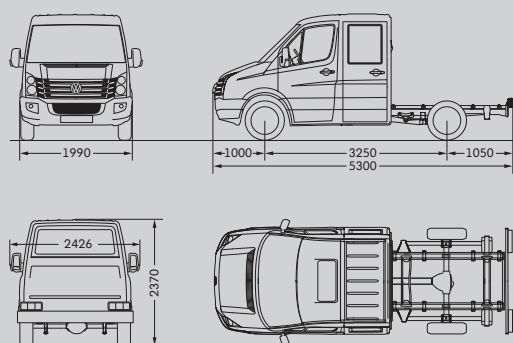

recommended exterior length for special body 2,160 mm

turning circle 12.3 m


Crafter 35 Chassis with double cab and medium wheelbase

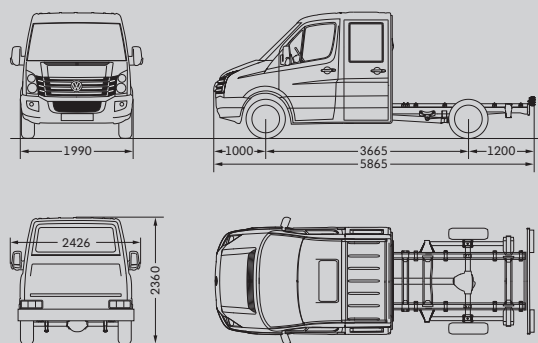

recommended exterior length for special body 2,770 mm

turning circle 13.5 m

Crafter 35 Chassis with double cab and long wheelbase

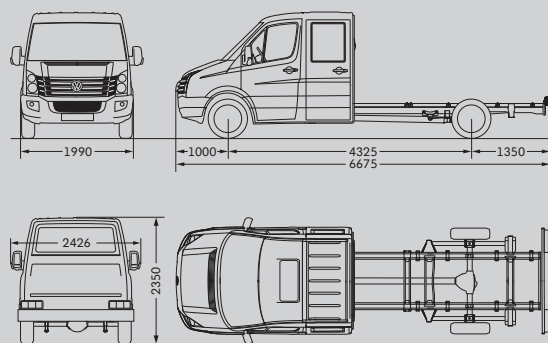


recommended exterior length for special body 3,440 mm

turning circle 15.6 m


Dimensional drawings Dropside Van / Chassis.

Crafter 50 Chassis with double cab and medium wheelbase

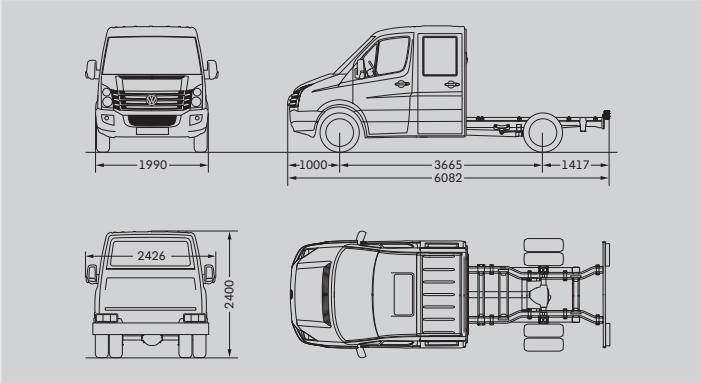


recommended exterior length for special body	2,770 mm
turning circle	13.5 m

Crafter 50 Chassis with double cab and long wheelbase

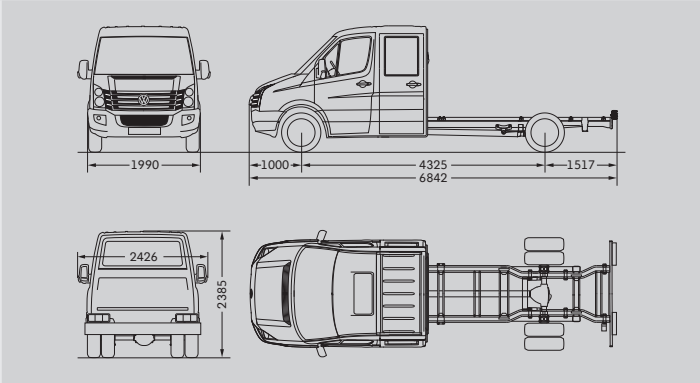


recommended exterior length for special body	3,610 mm
turning circle	15.6 m

Crafter 30 Dropside Van with single cab and short wheelbase

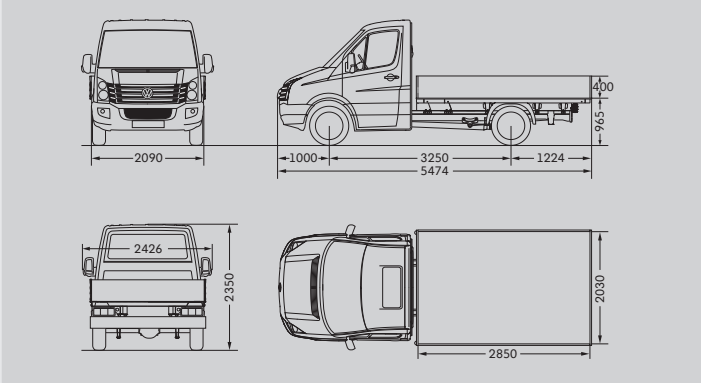


load area	5.8 m ²
turning circle	12.3 m

Crafter 30 Dropside Van with single cab and medium wheelbase

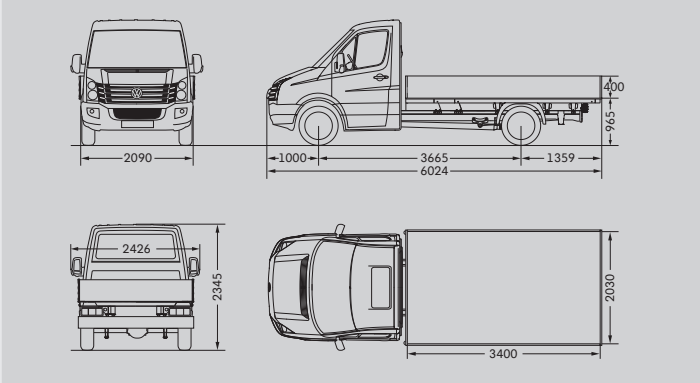


load area	6.9 m ²
turning circle	13.5 m

Crafter 35 Dropside Van with single cab and short wheelbase

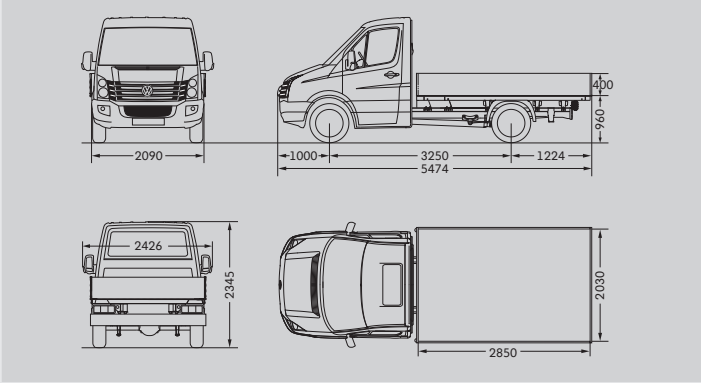

load area	5.8 m ²
turning circle	12.3 m


Crafter 35 Dropside Van with single cab and medium wheelbase

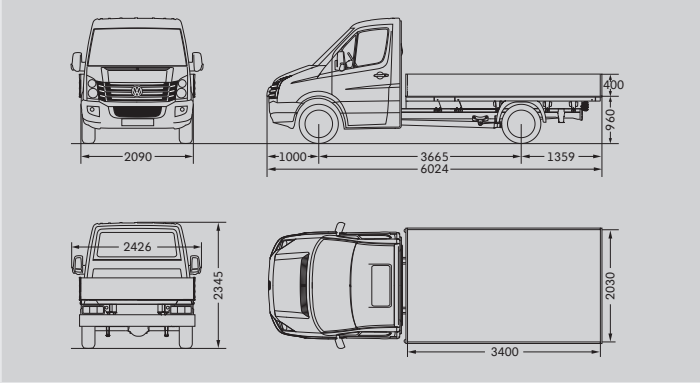

load area	6.9 m ²
turning circle	13.5 m


Dimensional drawings Dropside Van / Chassis.

Crafter 35 Dropside Van with single cab and long wheelbase

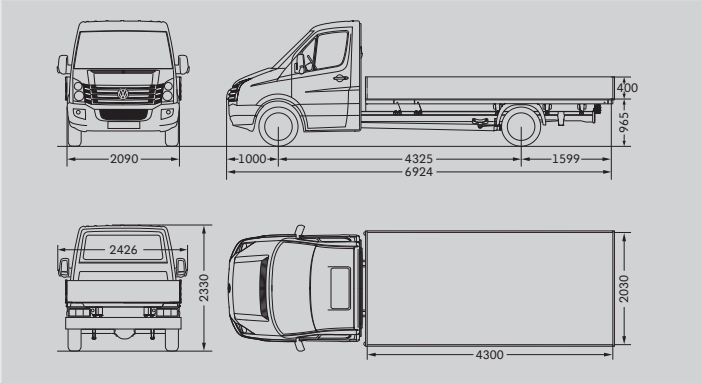


load area	8.7 m ²
turning circle	15.6 m

Crafter 50 Dropside Van with single cab and medium wheelbase

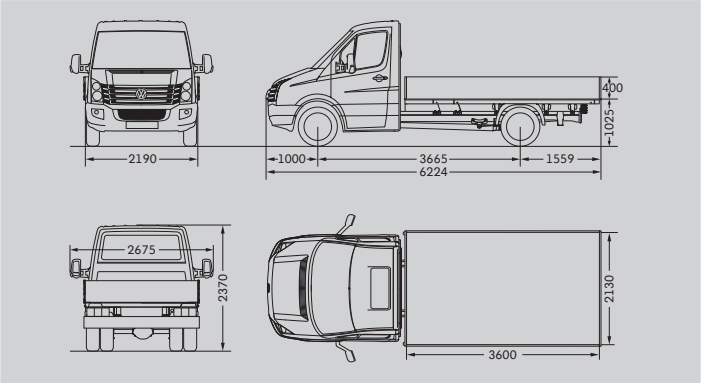


load area	7.7 m ²
turning circle	13.5 m

Crafter 50 Dropside Van with single cab and long wheelbase

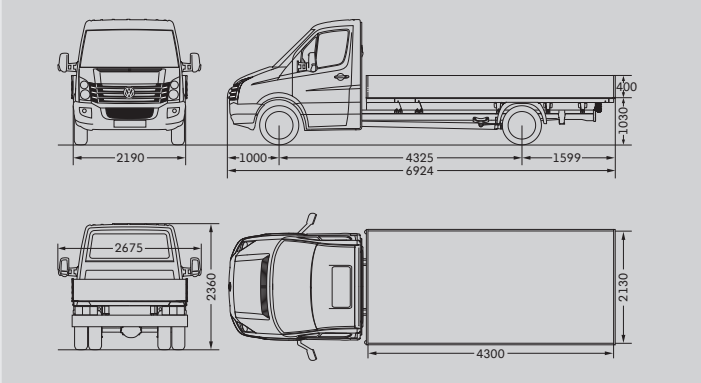


load area	9.2 m ²
turning circle	15.6 m

Crafter 30 Dropside Van with double cab and short wheelbase

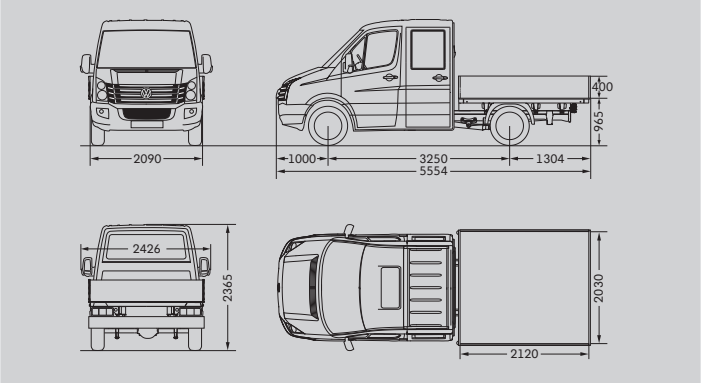


load area	4.3 m ²
turning circle	12.3 m

Crafter 30 Dropside Van with double cab and medium wheelbase

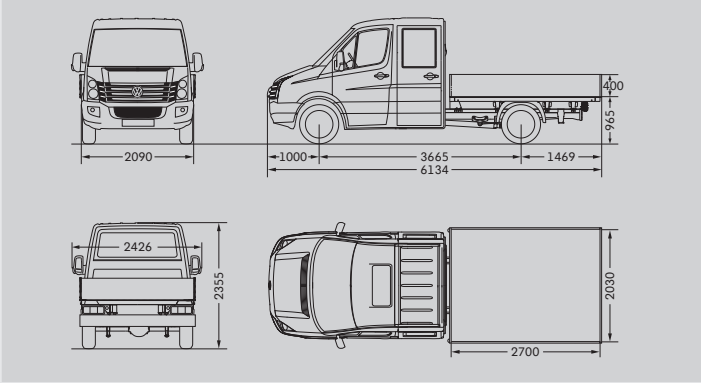

load area	5.5 m ²
turning circle	13.5 m


Crafter 35 Dropside Van with double cab and short wheelbase

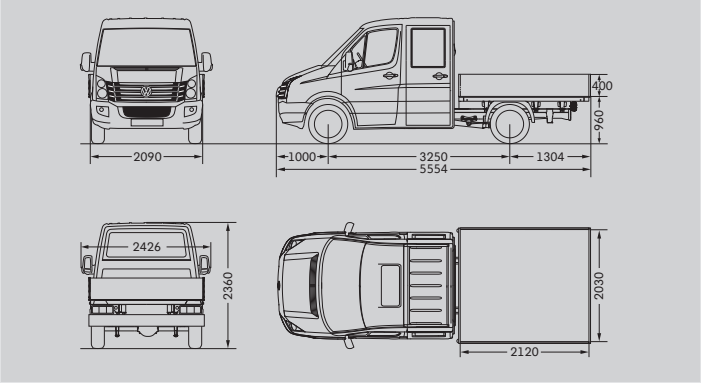

load area	4.3 m ²
turning circle	12.3 m


Dimensional drawings Dropside Van / Chassis.

Crafter 35 Dropside Van with double cab and medium wheelbase

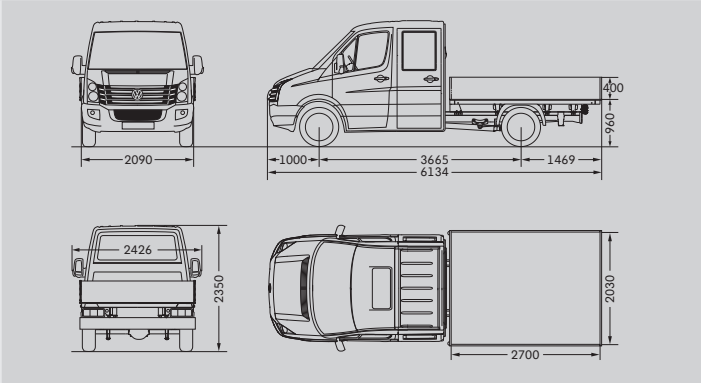


load area	5.5 m ²
turning circle	13.5 m

Crafter 35 Dropside Van with double cab and long wheelbase

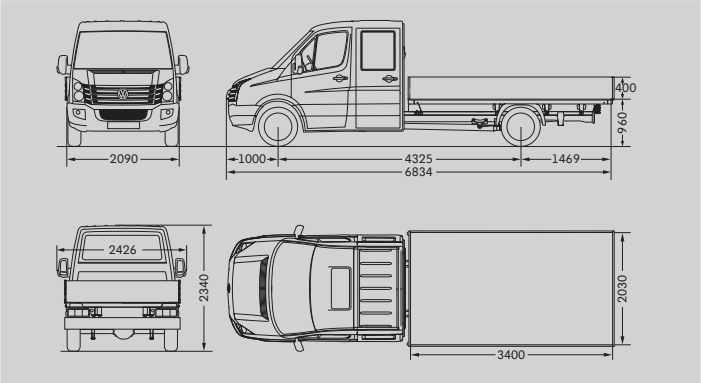


load area	6.9 m ²
turning circle	15.6 m

Crafter 50 Dropside Van with double cab and medium wheelbase

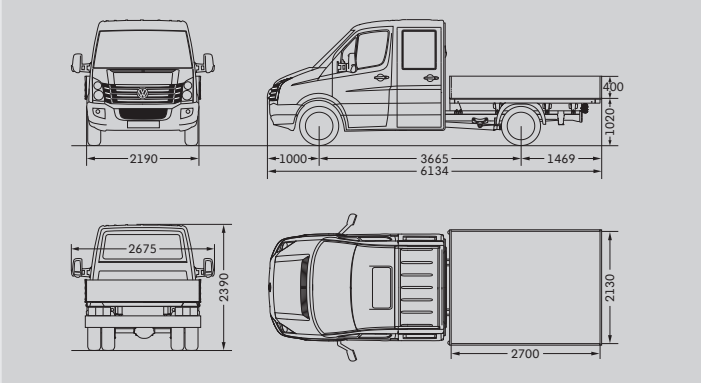

load area	5.8 m ²
turning circle	13.5 m

Crafter 50 Dropside Van with double cab and long wheelbase

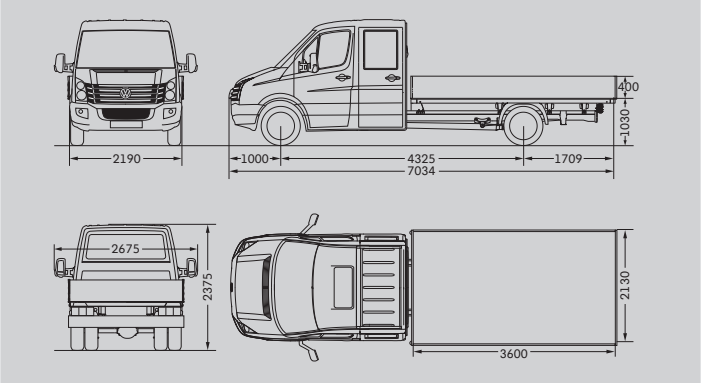

load area	7.7 m ²
turning circle	15.6 m